

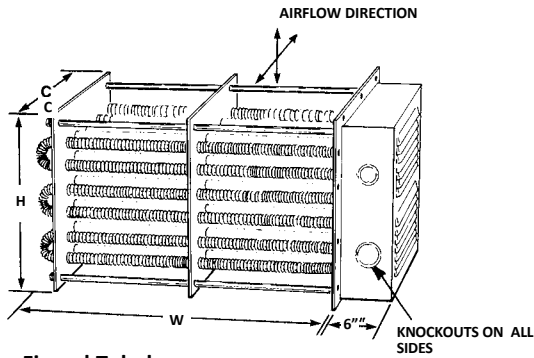


# Heater Listings

## 600° F Maximum Outlet Air Temperature

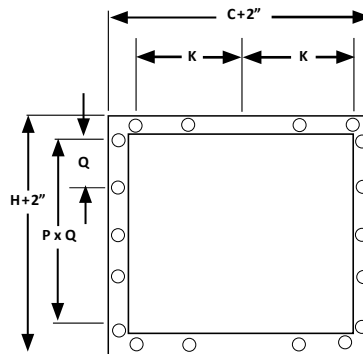

**Finned Tubular**

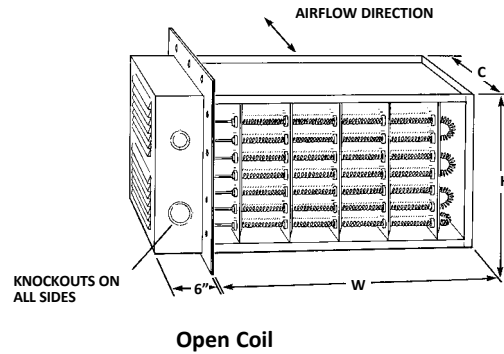

Heater Depth C	6"	9.5"							
Mtg. Hole Centers K	2"	3.5"							
Heater Height H	8"	12"	16"	20"	24"	30"	34"	38"	42"
No. of Spaces P	2	3	3	3	3	5	7	7	7
Mtg. Hole Centers Q	3"	3.75"	4.25"	5.25"	5.75"	4.88"	4.38"	4.88"	5.25"

**Mounting Hole Details** – Mounting hole patterns depend on heater C and H dimensions. Mounting holes are 9/32" diameter, centered 3/8" from the outside edge of the plate.

Heater Listings - 600° F at 900 SFPM Minimum Airflow										
KW	Dimensions (Inches)			Finned Tubular Construction 45 Watts/Sq. In.				Open Coil Construction 55 Watts/Sq. In.		
	W	H	C	Catalog Number	No. Of Elements	No. Of Circuits	Weight (Lbs.)	Catalog Number	No. Of Circuits	Weight (Lbs.)
4	12	8	6	HX-166N-801-601U	3	1	15	HX-165N-101-601U	1	10
5	16	8	6	HX-166N-802-601U	3	1	20	HX-165N-102-601U	1	10
7.5	20	8	6	HX-166N-803-601U	3	1	20	HX-165N-103-601U	1	15
8	12	12	6	HX-166N-804-601U	6	1	25	HX-165N-104-601U	1	10
9	24	8	6	HX-166N-805-601U	3	1	20	HX-165N-105-601U	1	15
10	16	12	6	HX-166N-806-601U	6	1	30	HX-165N-106-601U	1	15
10	26	8	6	HX-166N-807-601U	3	1	20	HX-165N-107-601U	1	15
12	12	16	6	HX-166N-808-601U	9	1	35	HX-165N-108-601U	1	15
12	32	8	6	HX-166N-809-601U	3	1	25	HX-165N-109-601U	1	15
15	16	16	6	HX-166N-810-601U	9	1	40	HX-165N-110-601U	1	15
15	20	12	6	HX-166N-811-601U	6	1	35	HX-165N-111-601U	1	15

Heaters are rated at 480 volts, 3 phase.



# Heater Listings

## 600° F Maximum Outlet Air Temperature

Heater Listings - 600° F at 900 SFPM Minimum Airflow										
KW	Dimensions (Inches)			Finned Tubular Construction 45 Watts/Sq. In.				Open Coil Construction 55 Watts/Sq. In.		
	W	H	C	Catalog Number	No. Of Elements	No. Of Circuits	Weight (Lbs.)	Catalog Number	No. Of Circuits	Weight (Lbs.)
15	40	8	6	HX-166N-812-601U	3	1	25	HX-165N-112-601U	1	20
16	12	20	6	HX-166N-813-601U	12	1	45	HX-165N-113-601U	1	15
18	24	12	6	HX-166N-814-601U	6	1	35	HX-165N-114-601U	1	20
20	12	24	6	HX-166N-815-601U	15	1	55	HX-165N-115-601U	1	15
20	16	20	6	HX-166N-816-601U	12	1	50	HX-165N-116-601U	1	20
20	26	12	6	HX-166N-817-601U	6	1	35	HX-165N-117-601U	1	20
22	20	16	6	HX-166N-818-601U	9	1	45	HX-165N-118-601U	1	20
24	12	30	6	HX-166N-819-601U	18	1	70	HX-165N-119-601U	1	20
24	32	12	6	HX-166N-820-601U	6	1	40	HX-165N-120-601U	1	20
25	16	24	6	HX-166N-821-601U	15	1	60	HX-165N-121-601U	1	20
27	24	16	6	HX-166N-822-601U	9	1	50	HX-165N-122-601U	1	20
28	12	34	6	HX-166N-823-601U	21	1	80	HX-165N-123-601U	1	20
30	16	30	6	HX-166N-824-601U	18	1	75	HX-165N-124-601U	1	25
30	20	20	6	HX-166N-825-601U	12	1	60	HX-165N-125-601U	1	20
30	26	16	6	HX-166N-826-601U	9	1	50	HX-165N-126-601U	1	25
30	40	12	6	HX-166N-827-601U	6	1	45	HX-165N-127-601U	1	25
32	12	38	6	HX-166N-828-601U	24	1	85	HX-165N-128-601U	1	25
35	16	34	6	HX-166N-829-601U	21	1	85	HX-165N-129-601U	1	25
36	12	42	6	HX-166N-830-601U	27	1	95	HX-165N-130-601U	1	25
36	24	20	6	HX-166N-831-601U	12	1	65	HX-165N-131-601U	1	25
36	32	16	6	HX-166N-832-601U	9	1	55	HX-165N-132-601U	1	25
37	20	24	6	HX-166N-833-601U	15	1	70	HX-165N-133-601U	1	25
40	12	24	9.5	HX-166N-834-601U	30	1	95	HX-165N-134-601U	1	25
40	16	38	6	HX-166N-835-601U	24	1	95	HX-165N-135-601U	1	30
40	26	26	6	HX-166N-836-601U	12	1	65	HX-165N-136-601U	1	25
45	12	30	9.5	HX-166N-837-601U	33	2	110	HX-165N-137-601U	2	30
45	16	42	6	HX-166N-838-601U	27	2	105	HX-165N-138-601U	2	35
45	20	30	6	HX-166N-839-601U	18	2	85	HX-165N-139-601U	2	30
45	24	24	6	HX-166N-840-601U	15	2	75	HX-165N-140-601U	2	30
45	40	16	6	HX-166N-841-601U	9	2	65	HX-165N-141-601U	2	35
48	12	30	9.5	HX-166N-842-601U	36	2	115	HX-165N-142-601U	2	30
48	32	20	6	HX-166N-843-601U	12	2	75	HX-165N-143-601U	2	30
50	16	24	9.5	HX-166N-844-601U	30	2	105	HX-165N-144-601U	2	30
50	26	24	6	HX-166N-845-601U	15	2	80	HX-165N-145-601U	2	30
52	12	34	9.5	HX-166N-846-601U	39	2	130	HX-165N-146-601U	2	30
52	20	34	6	HX-166N-847-601U	21	2	100	HX-165N-147-601U	2	35
54	24	30	6	HX-166N-848-601U	18	2	95	HX-165N-148-601U	2	35
55	16	30	9.5	HX-166N-849-601U	33	2	120	HX-165N-149-601U	2	35
56	12	34	9.5	HX-166N-850-601U	42	2	135	HX-165N-150-601U	2	30

Heaters are rated at 480 volts, 3 phase.

# Heater Listings

## 600° F Maximum Outlet Air Temperature

Heater Listings - 600° F at 900 SFPM Minimum Airflow										
KW	Dimensions (Inches)			Finned Tubular Construction 45 Watts/Sq. In.				Open Coil Construction 55 Watts/Sq. In.		
	W	H	C	Catalog Number	No. Of Elements	No. Of Circuits	Weight (Lbs.)	Catalog Number	No. Of Circuits	Weight (Lbs.)
60	12	38	9.5	HX-166N-851-601U	45	2	145	HX-165N-151-601U	2	35
60	16	30	9.5	HX-166N-852-601U	36	2	125	HX-165N-152-601U	2	35
60	20	38	6	HX-166N-853-601U	24	2	110	HX-165N-153-601U	2	35
60	26	30	6	HX-166N-854-601U	18	2	100	HX-165N-154-601U	2	35
60	32	24	6	HX-166N-855-601U	15	2	90	HX-165N-155-601U	2	35
60	40	20	6	HX-166N-856-601U	12	2	85	HX-165N-156-601U	2	40
64	24	34	6	HX-166N-857-601U	21	2	105	HX-165N-157-601U	2	40
64	12	38	9.5	HX-166N-858-601U	48	2	150	HX-165N-158-601U	2	35
64	16	34	9.5	HX-166N-859-601U	39	2	140	HX-165N-159-601U	2	40
68	20	42	6	HX-166N-860-601U	27	2	125	HX-165N-160-601U	2	40
68	12	42	9.5	HX-166N-861-601U	51	2	160	HX-165N-161-601U	2	35
70	16	34	9.5	HX-166N-862-601U	42	2	145	HX-165N-162-601U	2	40
70	26	34	6	HX-166N-863-601U	21	3	115	HX-165N-163-601U	2	40
72	12	42	9.5	HX-166N-864-601U	54	3	170	HX-165N-164-601U	2	35
72	24	38	6	HX-166N-865-601U	24	2	120	HX-165N-165-601U	2	40
72	32	30	6	HX-166N-866-601U	18	2	110	HX-165N-166-601U	2	45
75	16	38	9.5	HX-166N-867-601U	45	5	160	HX-165N-167-601U	2	45
75	20	24	9.5	HX-166N-868-601U	30	5	125	HX-165N-168-601U	2	35
75	40	24	6	HX-166N-869-601U	15	5	105	HX-165N-169-601U	2	45
80	16	38	9.5	HX-166N-870-601U	48	2	165	HX-165N-170-601U	2	45
80	26	38	6	HX-166N-871-601U	24	2	130	HX-165N-171-601U	2	45
80	24	42	9.5	HX-166N-872-601U	27	3	155	HX-165N-172-601U	2	70
82	20	30	9.5	HX-166N-873-601U	33	11	145	HX-165N-173-601U	3	45
85	32	34	6	HX-166N-874-601U	21	3	125	HX-165N-174-601U	3	50
85	16	42	9.5	HX-166N-875-601U	54	3	175	HX-165N-175-601U	3	45
90	16	42	9.5	HX-166N-876-601U	54	3	185	HX-165N-176-601U	3	45
90	20	30	9.5	HX-166N-877-601U	36	3	150	HX-165N-177-601U	3	45
90	24	24	9.5	HX-166N-878-601U	30	5	140	HX-165N-178-601U	3	45
90	26	42	6	HX-166N-879-601U	27	3	145	HX-165N-179-601U	3	50
90	40	30	6	HX-166N-880-601U	18	3	125	HX-165N-180-601U	3	55
96	20	34	9.5	HX-166N-881-601U	24	4	140	HX-165N-181-601U	3	55
98	20	34	9.5	HX-166N-882-601U	42	7	165	HX-165N-182-601U	3	50
100	24	30	9.5	HX-166N-883-601U	33	11	155	HX-165N-183-601U	3	50
100	26	24	9.5	HX-166N-884-601U	30	5	145	HX-165N-184-601U	3	45
105	20	34	9.5	HX-166N-885-601U	42	7	175	HX-165N-185-601U	3	50
105	40	34	6	HX-166N-886-601U	21	7	145	HX-165N-186-601U	3	60
108	24	30	9.5	HX-166N-887-601U	36	3	165	HX-165N-187-601U	3	50
108	32	42	9.5	HX-166N-888-601U	27	3	175	HX-165N-188-601U	3	90
110	26	30	9.5	HX-166N-889-601U	33	11	165	HX-165N-189-601U	3	55

Heaters are rated at 480 volts, 3 phase.



# Heater Listings

## 600° F Maximum Outlet Air Temperature

Heater Listings - 600° F at 900 SFPM Minimum Airflow										
KW	Dimensions (Inches)			Finned Tubular Construction 45 Watts/Sq. In.				Open Coil Construction 55 Watts/Sq. In.		
	W	H	C	Catalog Number	No. Of Elements	No. Of Circuits	Weight (lbs.)	Catalog Number	No. Of Circuits	Weight (lbs.)
112	20	38	9.5	HX-166N-890-601U	45	5	190	HX-165N-190-601U	3	55
117	24	34	9.5	HX-166N-891-601U	42	7	185	HX-165N-191-601U	3	55
120	20	38	9.5	HX-166N-892-601U	48	4	200	HX-165N-192-601U	3	55
120	26	30	9.5	HX-166N-893-601U	36	3	175	HX-165N-193-601U	3	55
120	32	24	9.5	HX-166N-894-601U	30	5	165	HX-165N-194-601U	3	55
120	40	38	6	HX-166N-895-601U	24	4	160	HX-165N-195-601U	3	65
125	24	34	9.5	HX-166N-896-601U	42	7	195	HX-165N-196-601U	4	55
127	20	42	9.5	HX-166N-897-601U	54	6	215	HX-165N-197-601U	4	60
130	26	34	9.5	HX-166N-898-601U	42	7	195	HX-165N-198-601U	4	60
132	32	30	9.5	HX-166N-899-601U	33	11	185	HX-165N-199-601U	4	65
135	20	42	9.5	HX-166N-900-601U	54	6	220	HX-165N-201-601U	4	60
135	24	38	9.5	HX-166N-901-601U	45	5	210	HX-165N-202-601U	4	65
135	40	42	6	HX-166N-902-601U	27	9	180	HX-165N-203-601U	4	75
140	26	34	9.5	HX-166N-903-601U	42	7	205	HX-165N-204-601U	4	60
145	24	38	9.5	HX-166N-904-601U	48	4	220	HX-165N-205-601U	4	65
145	32	30	9.5	HX-166N-905-601U	36	4	200	HX-165N-206-601U	4	65
150	26	38	9.5	HX-166N-906-601U	45	5	220	HX-165N-207-601U	4	70
150	40	24	9.5	HX-166N-907-601U	30	5	190	HX-165N-208-601U	4	70
155	24	42	9.5	HX-166N-908-601U	54	5	235	HX-165N-209-601U	4	70
155	32	34	9.5	HX-166N-909-601U	42	7	215	HX-165N-210-601U	4	75
160	26	38	9.5	HX-166N-910-601U	48	4	230	HX-165N-211-601U	4	70
160	24	42	9.5	HX-166N-911-601U	54	5	245	HX-165N-212-601U	5	70
165	40	30	9.5	HX-166N-912-601U	33	11	215	HX-165N-213-601U	5	85
170	32	34	9.5	HX-166N-913-601U	42	7	230	HX-165N-214-601U	5	75
170	26	42	9.5	HX-166N-914-601U	54	6	250	HX-165N-215-601U	5	75
180	26	42	9.5	HX-166N-915-601U	54	6	260	HX-165N-216-601U	5	75
180	32	38	9.5	HX-166N-916-601U	45	5	245	HX-165N-217-601U	5	80
180	40	30	9.5	HX-166N-917-601U	36	6	230	HX-165N-218-601U	5	85
190	32	38	9.5	HX-166N-918-601U	48	8	260	HX-165N-219-601U	5	80
195	40	34	9.5	HX-166N-919-601U	42	7	250	HX-165N-220-601U	5	90
205	32	42	9.5	HX-166N-920-601U	51	6	280	HX-165N-221-601U	6	90
210	40	34	9.5	HX-166N-921-601U	42	7	265	HX-165N-222-601U	6	95
215	32	42	9.5	HX-166N-922-601U	54	6	290	HX-165N-223-601U	6	90
225	40	38	9.5	HX-166N-923-601U	48	8	285	HX-165N-224-601U	6	100
240	40	38	9.5	HX-166N-924-601U	48	8	300	HX-165N-225-601U	7	100
255	40	42	9.5	HX-166N-925-601U	54	9	320	HX-165N-226-601U	7	110
270	40	42	9.5	HX-166N-926-601U	54	9	335	HX-165N-227-601U	7	110

Heaters are rated at 480 volts, 3 phase.